


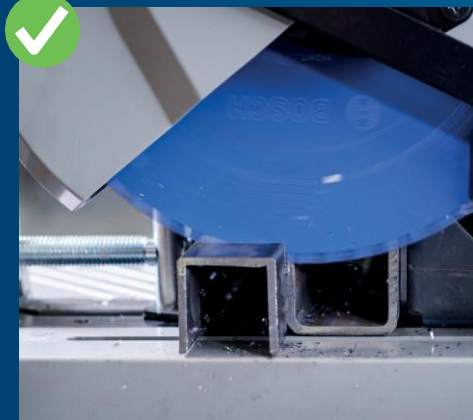
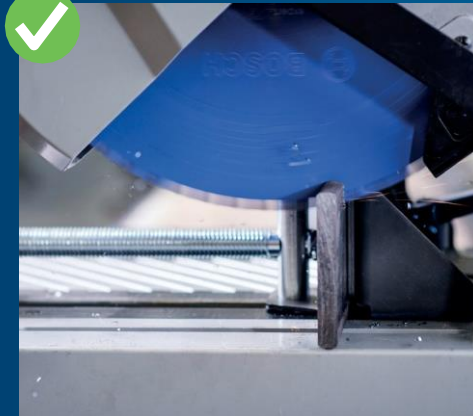


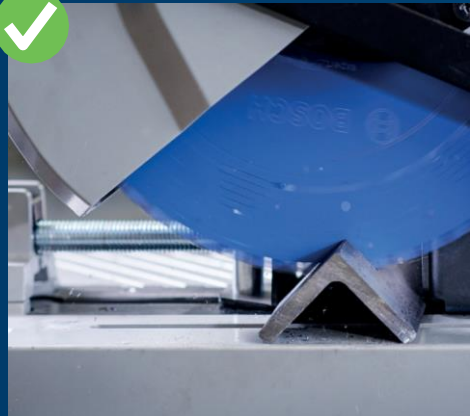

올바른 고정 방법


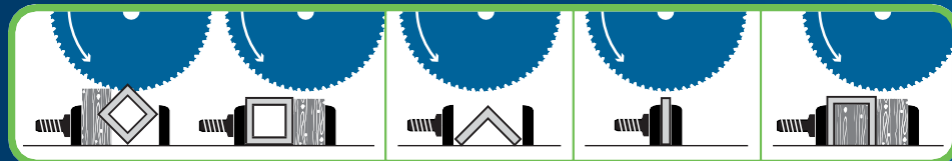


잘못된 고정 방법

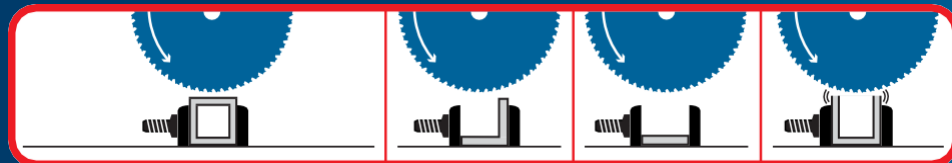

금속용 원형 톱날의 올바른 사용 방법

- ▶ 아래의 표에 따라 알맞은 원형 톱날을 선택하시기 바랍니다.
- ▶진동 등을 방지하기 위하여 작업물을 아래의 그림과 같이 고정하십시오.
- ▶작업물에 천천히 접근하고 적절한 압력으로 누르세요.

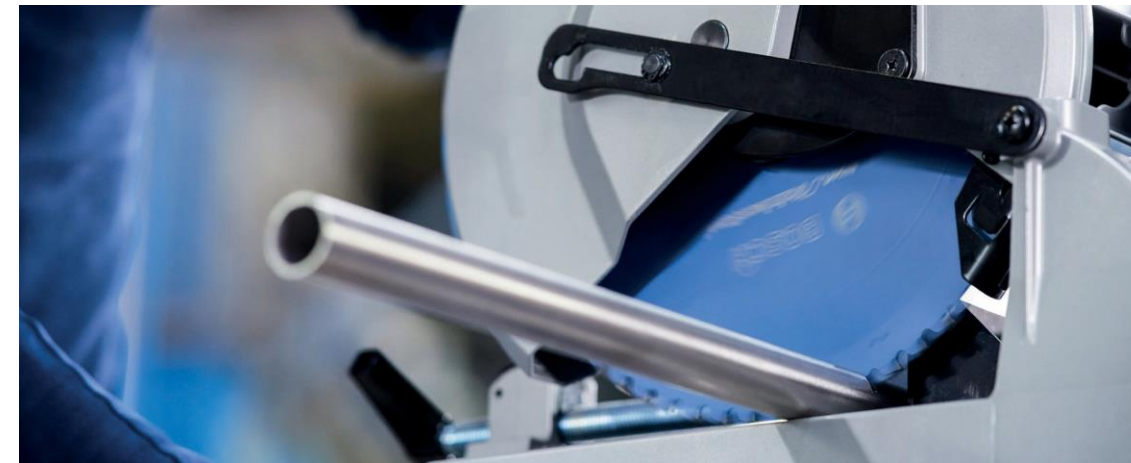


금속의 종류 및 두께에 따른 원형톱날 선택 방법



expert **for Steel**

																	
금속 판재		사각 파이프		C 형강		ㄱ자 앵글		기타 형강		철근		원형 파이프			모든 종류의 스테인레스 스틸		
금속 두께[mm]																	
<2.4	≥2.5...≤8.0	<2.4	≥2.5...≤4.5	<2.4	≥2.5...≤4.5	<2.4	≥2.5...≤4.5	<2.4	≥2.5...≤3.2	6 ≤ ϕ ≤ 10	11 ≤ ϕ ≤ 28	<2.4	≥2.5...≤6.0	외경 [mm]	날수	제품번호 2 608...	
추천표																제품 정보	
✓	—	✓	—	✓	—	✓	—	✓	—	✓	—	✓	—	✗	254	60	643 059
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	—	✓	✓	✓	✗	305	60	643 060
✓	—	✓	—	✓	—	✓	—	✓	—	✓	—	✓	—	✗	305	80	643 061
—	✓	—	✓	—	✓	—	✓	—	✓	—	✓	—	✓	✗	355	80	643 062
✓	—	✓	—	✓	—	✓	—	✓	—	✓	—	✓	—	✗	355	90	643 063



expert **for StainlessSteel**

																
금속 판재		사각 파이프		C 형강		ㄱ자 앵글		기타 형강		철근		원형 파이프				
금속 두께[mm]														외경 [mm]	날수	제품번호 2608...
≤2.0	≥2.1...≤3.5	≤2.0	≥2.1...≤3.5	<2.4	≥2.1...≤3.5	<2.0	≥2.1...≤3.5	<2.4	≥2.1...≤3.2	6 ≤ ϕ ≤ 10	11 ≤ ϕ ≤ 28	<2.0	≥2.1...≤3.5			
추천표														제품 정보		
-	✓	-	✓	-	✓	-	✓	-	✓	✓	-	-	✓	255	50	644 286
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	✓	305	60	644 285
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	305	80	644 284
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	✓	355	70	644 283
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	355	90	644 282

✗ 적합하지 않음 - 보통 ✓ 우수 ✓ 최우수